
## **Espirokit Suction**

Seven-metre section of special suction hose with 1" connector accessories, female fitting and check suction valve.



## **Features**

- For food use in accordance with European regulations EC 1935/2004 and EU 10/2011 (see declaration of conformity).
- The hose wall is smooth on the inside and corrugated on the outside.
- Good chemical resistance associated with PVC's resistance chart.
- Supplied in 7-metre rolls with two 1" connectors, assembled and fixed, one of which is equipped with a check suction valve, in metal or plastic.
- Recommended temperature for use between -10°C and 60°C.

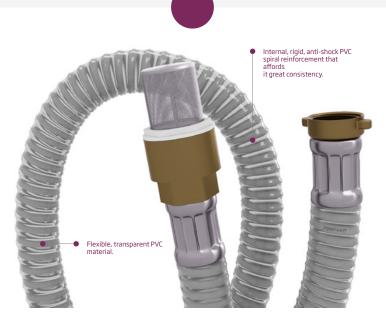





INDUSTRIAL

AGRICULTURAL





FREE FROM

## **Applications**

- ▶ Pumping and suction in agricultural irrigation and gardening.
- Installation in small bilge pumps for the suction of liquids in ponds, gardens and similar domestic uses.

INT ø mm	INT ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H₂0
22	1"	3	280	5	15	75	9
25	1"	3	280	5	15	75	9
32	1"1/4	3	335	5	15	75	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given.  $Consult\,us\,for\,other\,diameters, colours\,and\,features.\,Ask\,our\,Sales\,Department\,about$ the minimum purchase amounts assigned to non-standard diameters.





ESPIROFLEX. MANUFACTURE OF FLEXIBLE HOSES