


Metalpress® Superflex

PVC hose with double reinforcement - textile and metal spiral - for suction and transfer of liquids in the agricultural sector and industry.

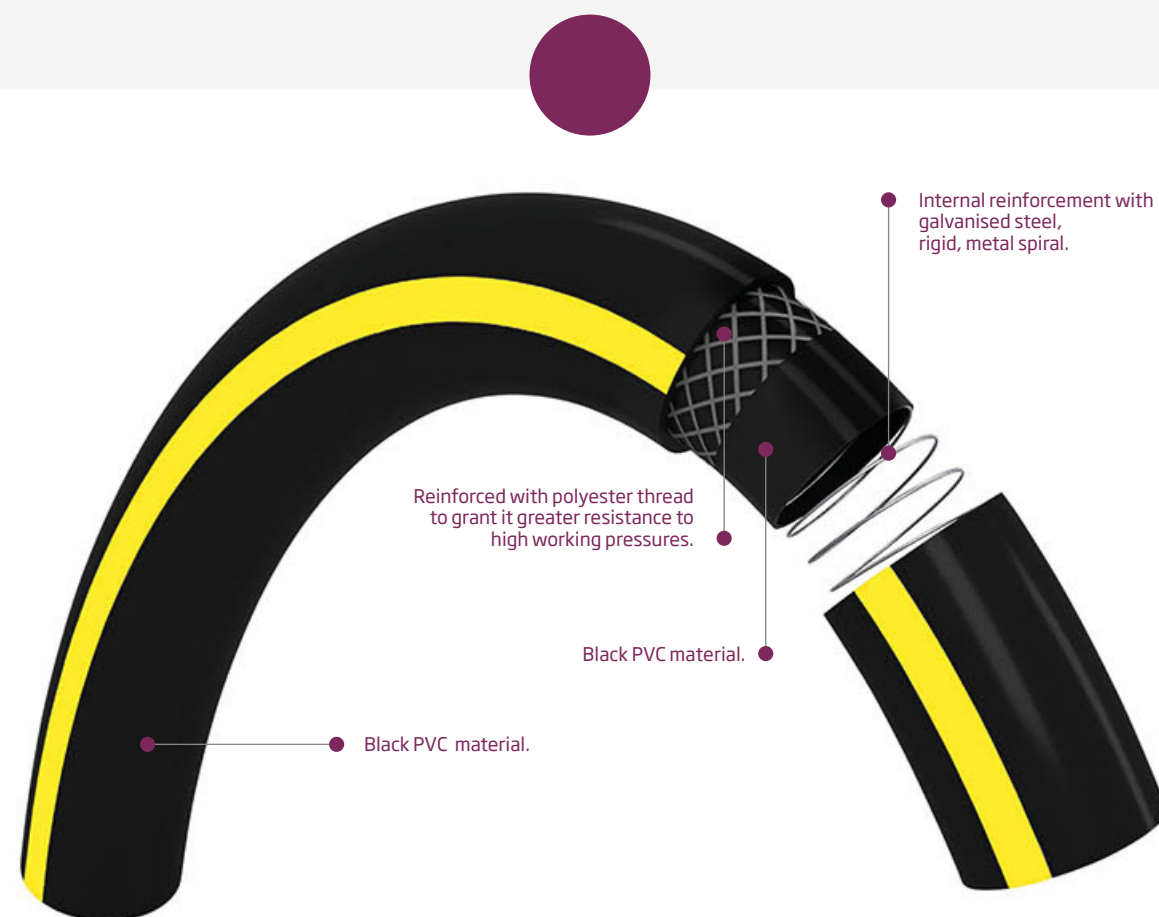

Features

- For agricultural and industrial use.
- Very flexible, even at low temperatures.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -30°C and 55°C.



INDUSTRIAL
USE



AGRICULTURAL
USE



RUBBER
FEEL



HIGH QUALITY
CONTROL



FREE FROM
Cd / Pb / Ba

Applications

- ▶ Pumping and suction of slurries. Tanker trucks.
- ▶ Transfer of chemical products with a low aggressiveness index.
- ▶ Industrial irrigation.
- ▶ Draining cesspits.
- ▶ Given its highly flexible nature, it is recommended for use in movable tanks.

INT Ø mm	INT Ø in	EXT Ø mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
20	3/4"	30	532	16	48	80	9
25	1"	35.5	697	16	48	100	9
30	1"	40.5	812	16	48	120	9
32	1 1/4"	42.5	859	16	48	125	9
35	1 3/8"	47	1058	14	42	140	9
38	1 1/2"	51	1236	14	42	160	9
40	1 5/8"	53	1291	14	42	160	9
45	1 3/4"	58	1485	12	36	180	9
51	2"	64	1622	12	36	200	9
60	2 1/32"	74	2012	12	36	240	9
63	2 1/2"	77	2102	12	36	250	9
76	3"	91.8	2881	12	36	300	9
80	3 1/8"	95.8	3084	12	36	320	9
90	3 1/2"	105.8	3435	10	30	360	9
102	4"	117.8	3857	10	30	400	9
105	4"	120.8	3963	10	30	420	9
110	4"	126.7	4444	9	27	440	9
120	4 3/4"	136.7	4966	9	27	480	9
127	5"	143.7	5238	8	24	520	9
152	6"	169.9	6570	7	21	600	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.