


Transfort® Superelastic Antiestático

Tube made by co-extrusion of vinyl components, according to the European Quality Norm UNE EN ISO 3994. Reinforced inside with a non plasticized PVC spiral, practically non deformable and anti-choke, which provides it a great consistency. An antistatic product suitable for facilities governed by ATEX regulations.

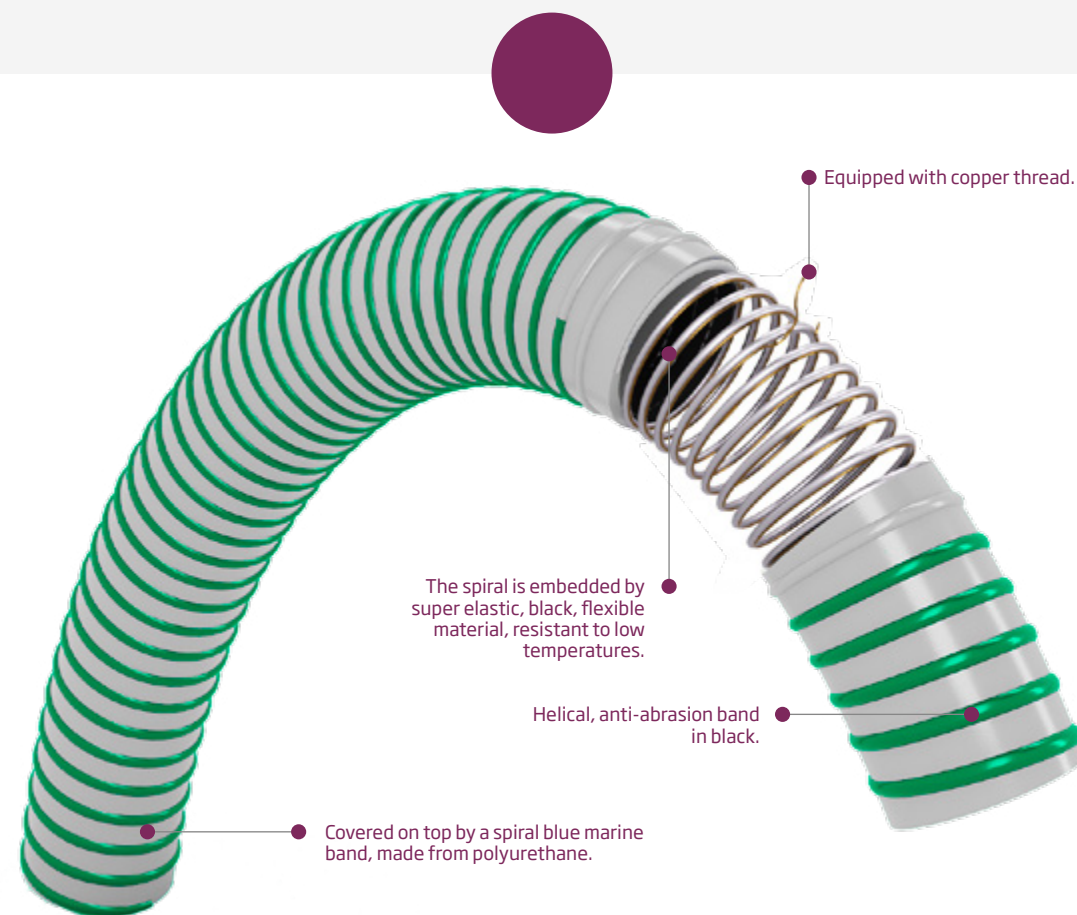

Features

- The tube is smooth inside, which prevents from the formation of sediments and facilitates the sterilization of them.
- Equipped with a copper wire that makes it antistatic
- Non toxic. Resistant to the atmospheric agents and to several chemical products.
- A copper wire is embedded in the wall, which provides the tube with anti-static properties when this wire is connected to earth.
- The recommended using temperature is within -40°C and 60°C.



INDUSTRIAL
USE



TANKER
TRUCK



AGRICULTURAL
USE



GREATER
FLEXIBILITY



HIGH QUALITY
CONTROL



FREE FROM
Cd / Pb / Ba

Applications

- ▶ Draining of cesspools, sewers. Industrial sprinkling. Suction and impulsion of liquid manure and chemical products.
- ▶ Pneumatic transport of seed and cereal.
- ▶ Transporting of powder and granules.
- ▶ Due to its great flexibility, it is recommended for using on tank cars.

INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
40	1" 5/8	4.5	730	6	18	160	9
45	1" 3/4	5.0	900	6	18	180	9
50	2"	5.2	1050	5	15	200	9
60	2" 1/8	5.5	1250	4.5	13.5	240	9
63	2" 1/32	6.0	1390	4.5	13.5	250	9
70	2" 1/2	6.5	1600	4.5	13.5	280	9
75	2" 3/4	6.5	1700	4	12	300	9
80	3"	6.5	1850	3.5	10.5	320	9
90	3" 1/8	6.7	2250	3.5	10.5	360	9
102	3" 1/2	7.3	2700	3	9	410	9
105	4"	7.4	2900	3	9	420	9
110	4" 3/4	7.5	3100	3	9	440	9
120	5"	8.0	3600	2.5	7.5	480	9
125	5"	8.3	3900	2.5	7.5	500	9
150	5" 1/2	9.5	5000	2	6	600	9
200	6"	12.1	10000	2	6	800	9
250	6"	12.1	12400	1.5	4.5	1000	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.