

Acetylene


Multi-layer, flexible PVC hose in red, reinforced with a polyester mesh. Specifically for conducting acetylene in welding equipment.

Applications

▶ Conducting oxygen and acetylene for welding.

212

ACETYLENE

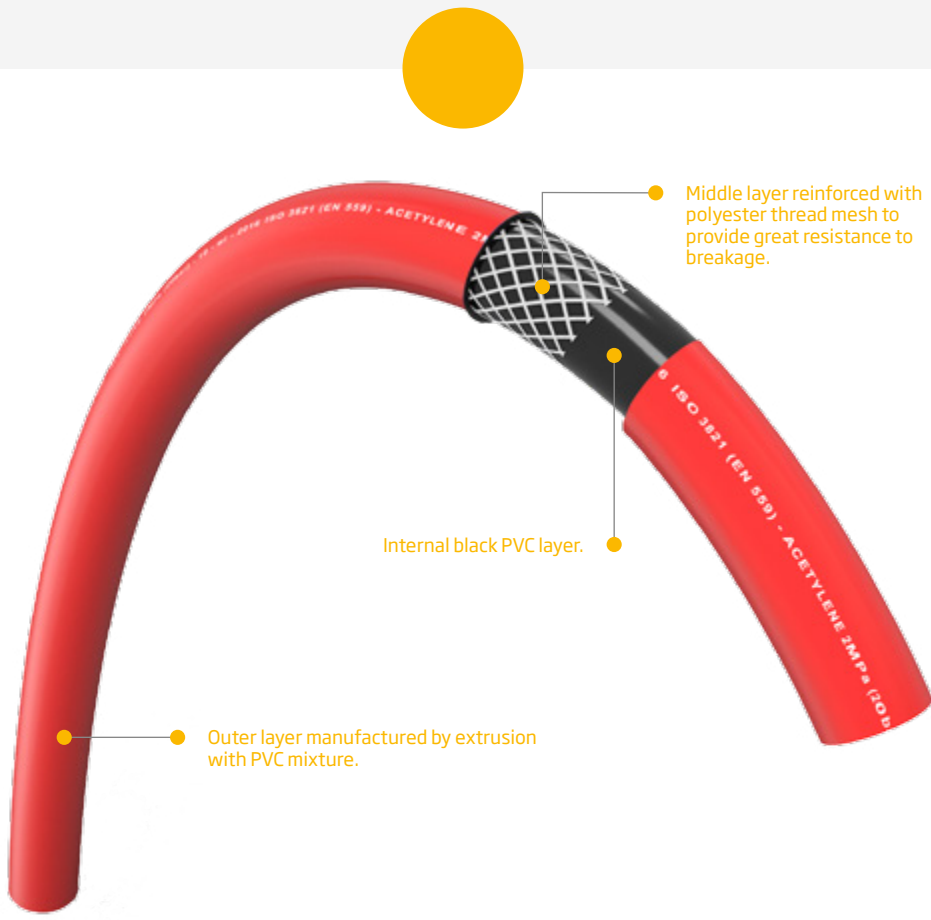

Features

- For industrial use.
- Highly flexible and easy to handle.
- Highly resistant to breakage when extended.
- Highly resistant to traction (7.5 MPa) and pressure at high temperatures.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -10°C and 60°C.
- Rubber option.



HIGH PRESSURES



EASY TO USE



HIGH QUALITY CONTROL



FREE FROM Cd / Pb / Ba



213

ACETYLENE

INT Ø mm	INT Ø in	EXT Ø mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar
8	5/16"	15	160	20	60
10	3/8"	17	170	20	60

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters

