


Bitubo

Very light and flexible double rubber hose manufactured via continuous manufacturing. Manufactured according to our own specifications and in line with EN 559.

Applications

► Designed especially for welding tasks, oxy-fuel welding and cutting, and similar industry techniques, shipbuilding and construction.

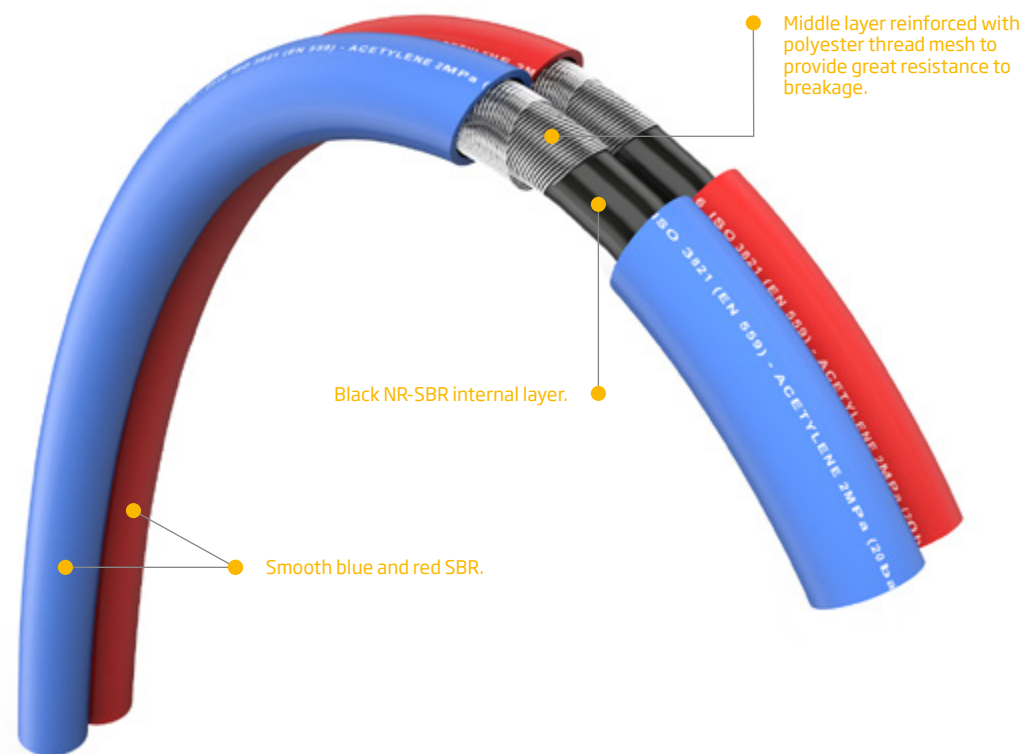

Features

- Made of smooth, black EPDM/SBR, reinforced by synthetic, high-tenacity thread.
- Guarantees perfect adherence thanks to collective extrusion.
- Resistant to abrasion.
- Smooth or striated red or blue surface.
- Withstands temperatures between -25°C and 100°C.



INDUSTRIAL
USE



CHEMICAL
TRANSPORT

INT Ø mm	INT Ø in	EXT Ø mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar
6+6	1/4" + 1/4"	12+12	26	10/20	30/60
8+9	5/16" + 3/8"	16+16	44	10/20	30/60

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances.
Depending on technical developments, specifications may be modified without advance notice being given.
Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters

