Applications

INTØ INTØ EXTØ WEIGHT BENDING RADIUS

32 160

32 1" 1/4 41 260

60 2"1/4 70

COLOURS AVAILABLE

9

9

9

EspiroEVA®

Features

- For domestic and industrial use.
- Highly resistant to permanent deformities.
- Resistant to UV rays, the cold and breakage when extended.
- Its bending radius is approximately twice its external diameter.
- Minimum pressure drop.
- Withstands temperatures between -30°C and 55°C.
- Can also be made in black.












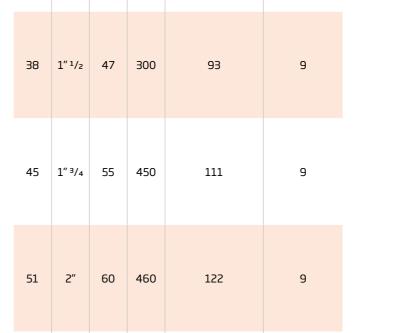

82



146

Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters $\dot{\ }$

600



178

179