

Espirofuel® Antiestático

Hose with special stability when dealing with hydrocarbons, gasoline and fuel, which makes it perfect for pumping and suctioning petroleum products and industrial oils. An antistatic product suitable for facilities governed by ATEX regulations.


Applications

► Suction and transfer of hydrocarbons and industrial oils.

118

ESPIROFUEL® ANTIESTÁTICO

ESPIROFLEX. MANUFACTURE OF FLEXIBLE HOSES

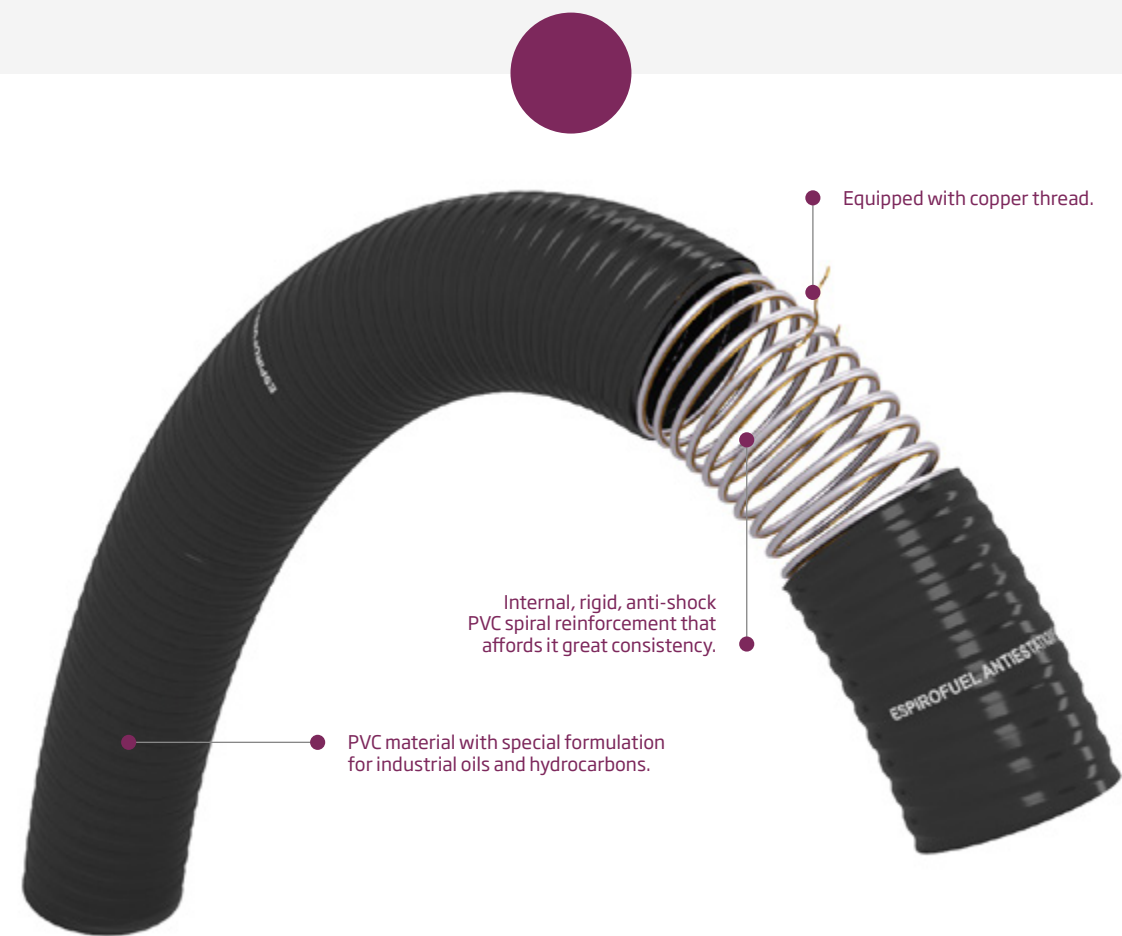

Features

- For industrial use.
- Special formulation for industrial oils and hydrocarbons, diesel, gasoline, etc.
- Equipped with a copper wire that makes it antistatic.
- The hose wall is smooth on the inside and corrugated on the outside.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -25°C and 70°C.



INDUSTRIAL
USE



AGRICULTURAL
USE



RESISTANT TO
HYDROCARBONS



ANTISTATIC



HIGH QUALITY
CONTROL



FREE FROM
Cd / Pb / Ba

119

ESPIROFUEL® ANTIESTÁTICO

ESPIROFLEX. MANUFACTURE OF FLEXIBLE HOSES



INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
25	1"	4.3	550	7	21	160	9
30	1" 1/8	4.5	680	5	15	192	9
35	1" 3/8	4.5	750	5	15	224	9
40	1" 5/8	4.5	850	5	15	256	9
45	1" 3/4	5.5	1000	5	15	288	9
51	2"	5.5	1200	5	15	320	9
55	2" 1/8	5.5	1400	5	15	350	9
60	2" 1/4	6	1600	5	15	384	9
63	2" 1/2	6	1700	5	15	403	9
70	2" 3/4	6.3	1900	5	15	448	9
76	3"	6.5	2000	5	15	480	9
80	3" 1/8	6.7	2200	4	12	512	9
90	3" 1/2	7	2600	4	12	576	9
102	4"	7	3300	4	12	640	9
110	4"	7	3610	4	12	700	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.