
Espirokit Suction

Seven-metre section of special suction hose with 1" connector accessories, female fitting and check suction valve.



Features

- For food use in accordance with European regulations EC 1935/2004 and EU 10/2011 (see declaration of conformity).
- The hose wall is smooth on the inside and corrugated on the outside.
- Good chemical resistance associated with PVC's resistance chart.
- Supplied in 7-metre rolls with two 1" connectors, assembled and fixed, one of which is equipped with a check suction valve, in metal or plastic.
- Recommended temperature for use between -10°C and 60°C.

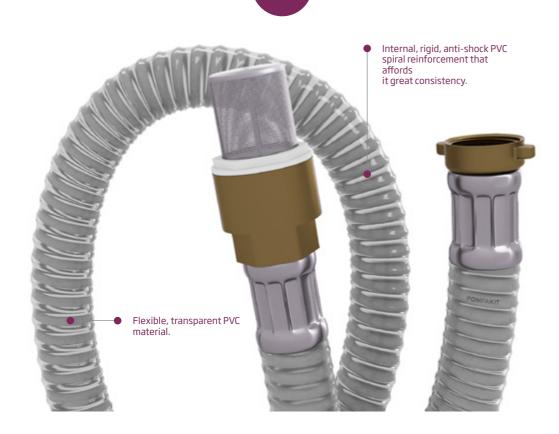











FREE FROM

Applications

- ▶ Pumping and suction in agricultural irrigation and gardening.
- Installation in small bilge pumps for the suction of liquids in ponds, gardens and similar domestic uses.

MINIMIIM

INT ø mm	INT ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H₂0
22	1"	3	280	5	15	75	9
25	1"	3	280	5	15	75	9
32	1"1/4	3	335	5	15	75	9

 $Pressure\ at\ room\ temperature\ in\ laboratory\ /\ Nominal\ values\ without\ considering\ manufacturing\ tolerances.$ Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.



















