
Espirolayflat®

Flat, flexible, monolayer hose made from plasticised PVC, reinforced internally by polyester fibre.

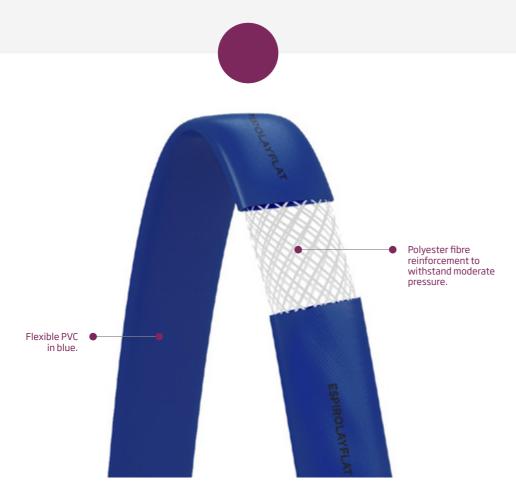

Features

- Made of PVC for industrial and agricultural use, covering a polyester mesh such that it forms a single layer.
- Highly flexible and light.
- Thanks to its flat structure, it is easy to use and roll up, occupying little space.
- · Easy to install.

- Adapted clamps should be employed during use to ensure the hose's subsequent good functioning.
- Recommended temperature for use between -10°C and 60°C.



INDUSTRIAL











Applications

- Piping agricultural drip irrigation.
- Piping water at low pressures.
- ▶ Particularly recommended for facilities that require the hose to be perforated in order to install the drip accessory.

INT ø mm	INT ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	LONG ROLL mm
25	1"	1.1	140	8	24	100
30	1″ ¹/8	1.1	150	6	18	100
32	1"1/4	1.1	170	6	18	100
40	1″ 5/8	1.1	220	6	18	100
51	2"	1	240	5	15	100
63	2" 1/2	1.15	320	4	12	100
76	3"	1.15	400	4	12	100
90	3″ ¹/2	1.15	425	4	12	100
102	4"	1.20	445	4	12	100
110	4" 5/16	1.20	515	4	12	100
127	5"	1.35	800	4	12	100
152	6"	1.35	900	3	9	50
203	8"	2.20	1785	3	9	50

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances.

Depending on technical developments, specifications may be modified without advance notice being given.

Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.



70

