


Espiopres® PU Conductivo

Reinforced anti-abrasive polyurethane (PU) and thermoplastic rubber compound hose with polyester fiber, used in machinery regulated by ATEX regulations, for tools pneumatics in general, airbrushes and paint guns.

Applications

► Machinery regulated by ATEX regulations for pneumatic tools in general, airbrushes and paint guns.

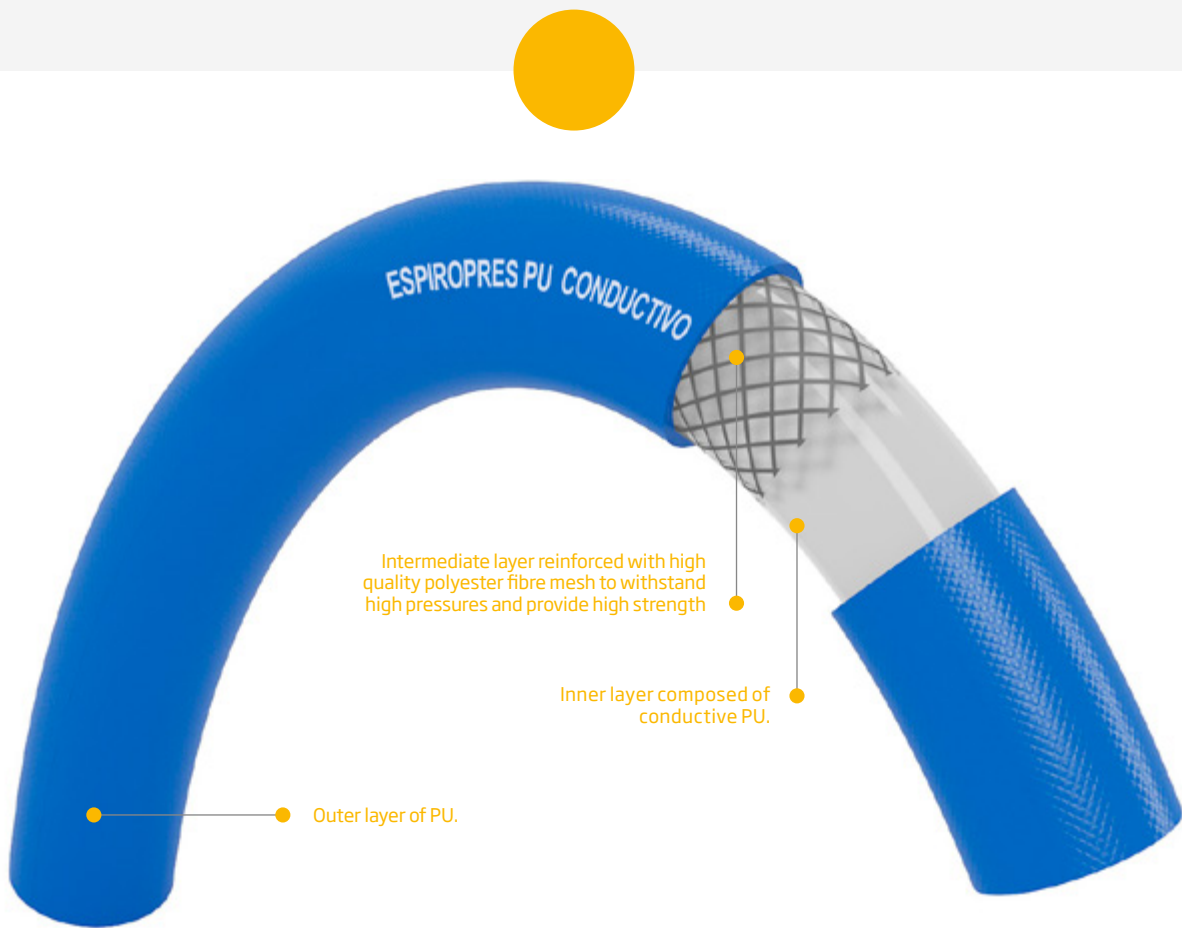

Features

- PU tube reinforced with polyester thread.
- Very light and flexible even at low temperatures.
- High resistance to abrasion, hydrolysis and microorganisms.



TRANSPORT OF CHEMICALS



INDUSTRIAL USE



EASY TO USE



HIGH PRESSURES



HIGH QUALITY CONTROL



SPRAYERS



ANTI-ABRASION

ø INT mm	ø INT in.	ø EXT mm	WEIGHT g/m	OPERATING PRESSURE bar	PRESSURE BURST PRESSURE bar	BENDING RADIUS mm
6	1/4"	10	65	20	60	20
8	5/16"	12	85	20	60	22
9.7	3/8"	13.7	90	20	60	35
10	3/8"	15	130	20	60	38
10	3/8"	19	140	20	60	50
13	1/2"	19	195	20	60	55
16	5/8"	23	250	20	60	60

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters