


Espiroseeder® PU

Flexible PVC hose, reinforced with a rigid, anti-shock PVC spiral equipped with antistatic material and inner layer of PU for maximum abrasion resistance against seeds transport erosion.

Applications

- ▶ Pumping of seeds in sowing machines.
- ▶ Pumping and suction of liquids in applications where the hose must have antistatic properties.

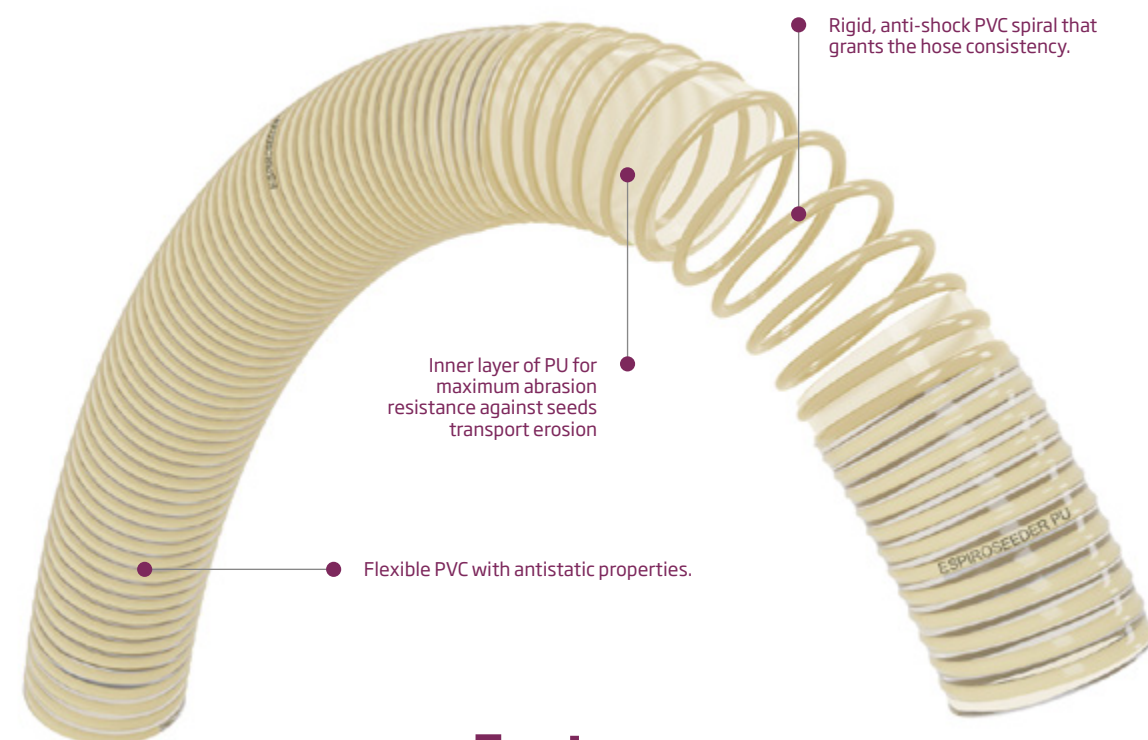

Features

- For industrial and agricultural use.
- Flexible, translucent PVC with a special formulation of low, superficial electrical resistivity, which grants the hose antistatic properties. ($10^9 < K.I. < 10^{11} \Omega.m$).
- Interior PU liner.
- The hose wall surface is smooth, both inside and outside.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -20°C and 60°C.



INDUSTRIAL
USE



AGRICULTURAL
USE



SMOOTH
INTERIOR



PVC
SPIRAL



HIGH QUALITY
CONTROL



MADE FROM
POLYURETHANE



FREE FROM
Cd / Pb / Ba



ANTISTATIC

INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	BURSTING PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
30	36	3.0	385	4	12	60	9
32	38	3.0	400	4	12	60	9
35	42	3.5	525	4	12	70	9
40	47	3.5	600	4	12	70	9
45	53	4.0	775	4	12	70	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters