


Fishflex®

Hose for pumping and transferring fish through sea water.
Highly resistant to salt, with a rigid, anti-shock spiral to protect the fish being piped.

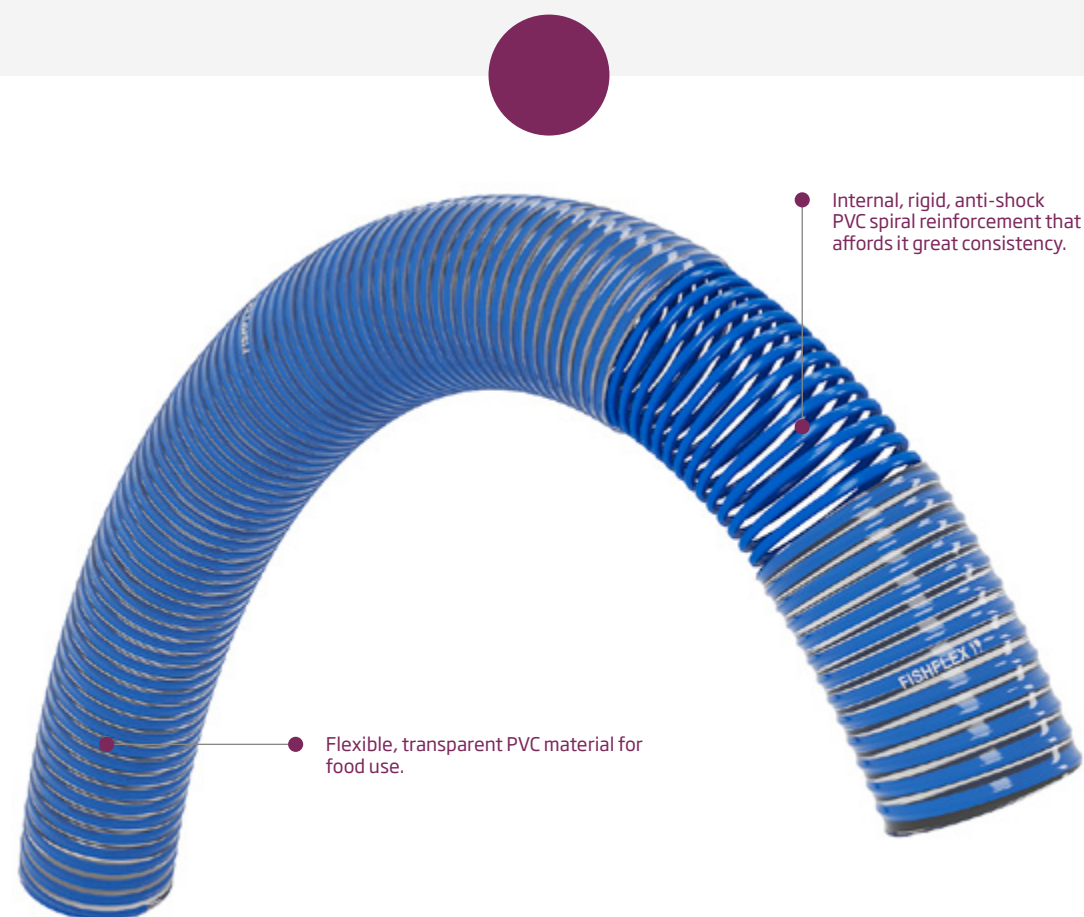

Internal, rigid, anti-shock PVC spiral reinforcement that affords it great consistency.

Flexible, transparent PVC material for food use.

Features

- For food use in accordance with European regulations EC 1935/2004 and EU 10/2011 (see declaration of conformity).
- Made of flexible, transparent PVC designed especially to withstand sea water.
- The hose wall is smooth on the inside and corrugated on the outside.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -25°C and 60°C.



FOOD
USE



INDUSTRIAL
USE



AGRICULTURAL
USE



RESISTANT TO SEA
SALT



HIGH QUALITY
CONTROL



FREE FROM
Cd / Pb / Ba

Applications

- ▶ Transfer of fish via sea water pumping.
- ▶ Transfer of liquid food products that require food simulants A, D2/3 in OM3 conditions in accordance with Regulation EU 10/2011.
- ▶ Piping salt water.

INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
63	1" 1/2	4.5	1029	6	18	315	9
102	4"	8.5	2900	4	12	500	9
152	6"	11.5	5600	3	9	750	9
203	8"	13.5	9000	2	6	1015	9
254	10"	16	13600	1.5	4.5	1250	9
305	12"	17	19000	1	3	1500	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances.
Depending on technical developments, specifications may be modified without advance notice being given.
Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.

