




Hidrotubo® Plus

Flexible, reinforced PVC hose with rigid, anti-shock PVC spiral, manufactured in accordance with UNE-EN ISO 3994 and with an internal, specially formulated layer (PROTECT®) to withstand oxidation and abrasion caused by water with a high chlorine concentration.

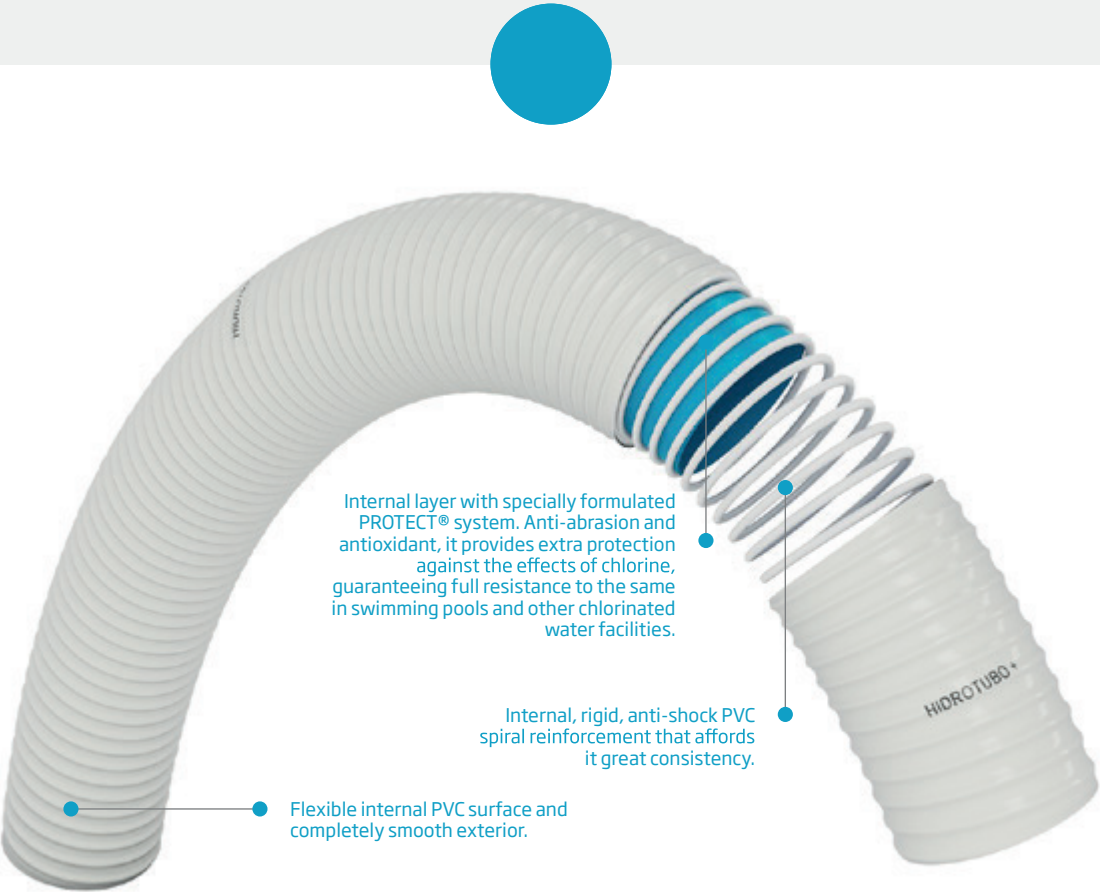


Features

- For industrial use and special use in swimming pools.
- Smooth internal and external surfaces. Highly flexible and light.
- PROTECT® internal surface, made from a material that grants it greater resistance to chlorinated products and abrasion.
- Rigid spiral with an ovate cross-section that provides greater resistance to compression.
- External diameters adjusted for easy assembly on PVC and PE seal fittings.
- Hermetically sealed and resistant at joint up to pressure of 30 bar.
- Withstands temperatures between -10°C and 60°C.
- Hose with good chemical resistance associated with PVC's usual properties.
- Great resistance to waste water and chlorinated swimming pool water with a high level of chlorination (> 3500 ppm).
- Hose with AENOR N MARK product certification in accordance with UNE-EN ISO 3994.



USE IN POOLS



CONSTRUCTION



HIGH QUALITY CONTROL



FREE FROM Cd / Pb / Ba

Applications

- ▶ Discharge, hydro-sanitary piping, swimming pool filtration systems with a high chlorine content, hydro-massage bathtubs.

INT Ø mm	INT Ø in	EXT Ø mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
42	1" 3/4	50	745	5	15	126	9
55	2" 1/8	63	950	5	15	165	9



Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters

