


Lisflex®

Hose for discharges, pumping of liquids and conduction in filtration circuits for ponds, small lakes, baths and similar gardening uses.
Pumping and suction in agricultural machinery.

Applications

► Discharge circuits for swimming pools, ponds, small lakes and garden fountains.

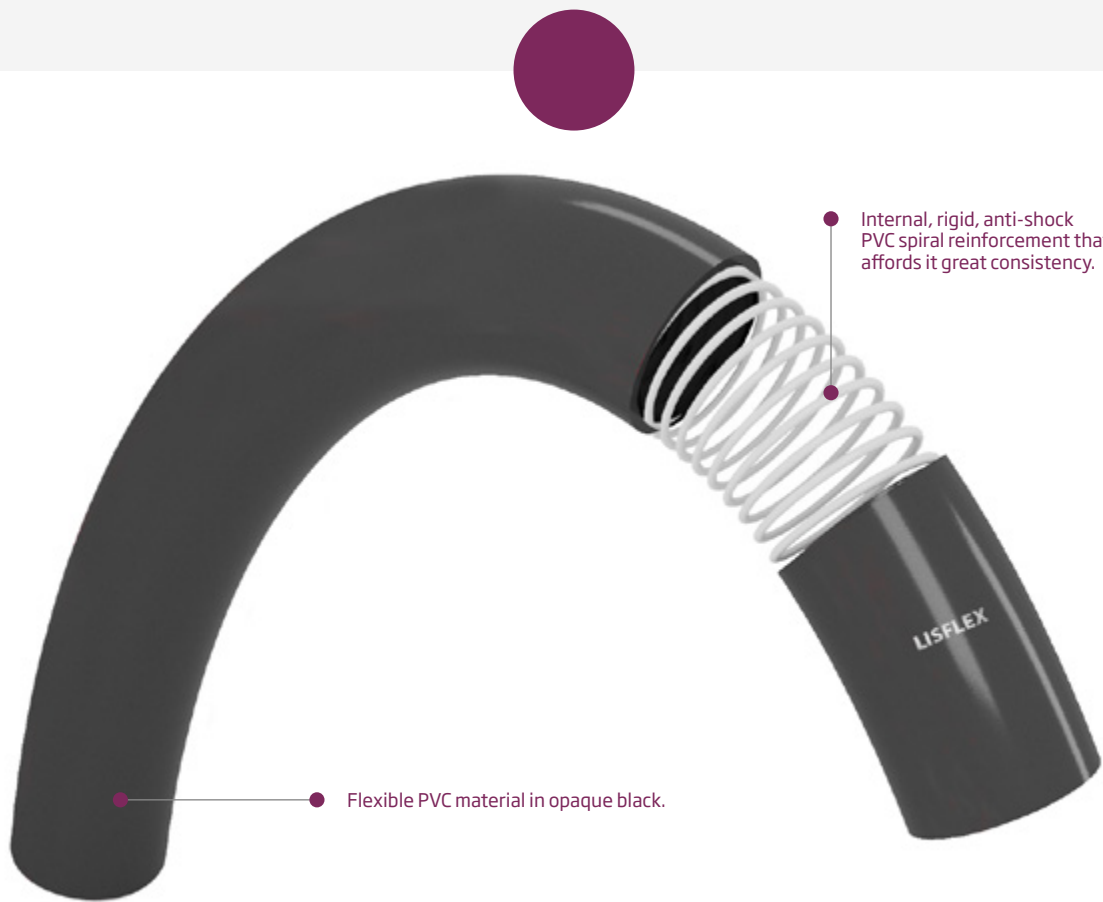

Features

- For agricultural and industrial use.
- The hose wall is smooth, both inside and outside.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -10°C and 60°C.



DOMESTIC
USE



INDUSTRIAL
USE



AGRICULTURAL
USE



HIGH QUALITY
CONTROL



FREE FROM
Cd / Pb / Ba



INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
19	¾"	1.7	181	5	15	80	9
25	1"	2.3	250	4	12	100	9
32	1¼"	2.7	380	4	12	130	9
38	1½"	2.8	470	4	12	160	9
40	1⅝"	3	510	4	12	160	9
51	2"	3.7	760	3	9	200	9
63	1½"	3.8	1050	3	9	250	9
70	2¾"	4.8	1500	3	9	280	9
76	3"	4.8	1700	3	9	300	9
102	4"	4.8	2100	3	9	400	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances.
Depending on technical developments, specifications may be modified without advance notice being given.
Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.

