


Metalpress® Marine

PVC hose with double reinforcement, textile and metal spiral.
Low permeability to odors for the suction and impulsion of liquids from the waste water discharge system in boats.

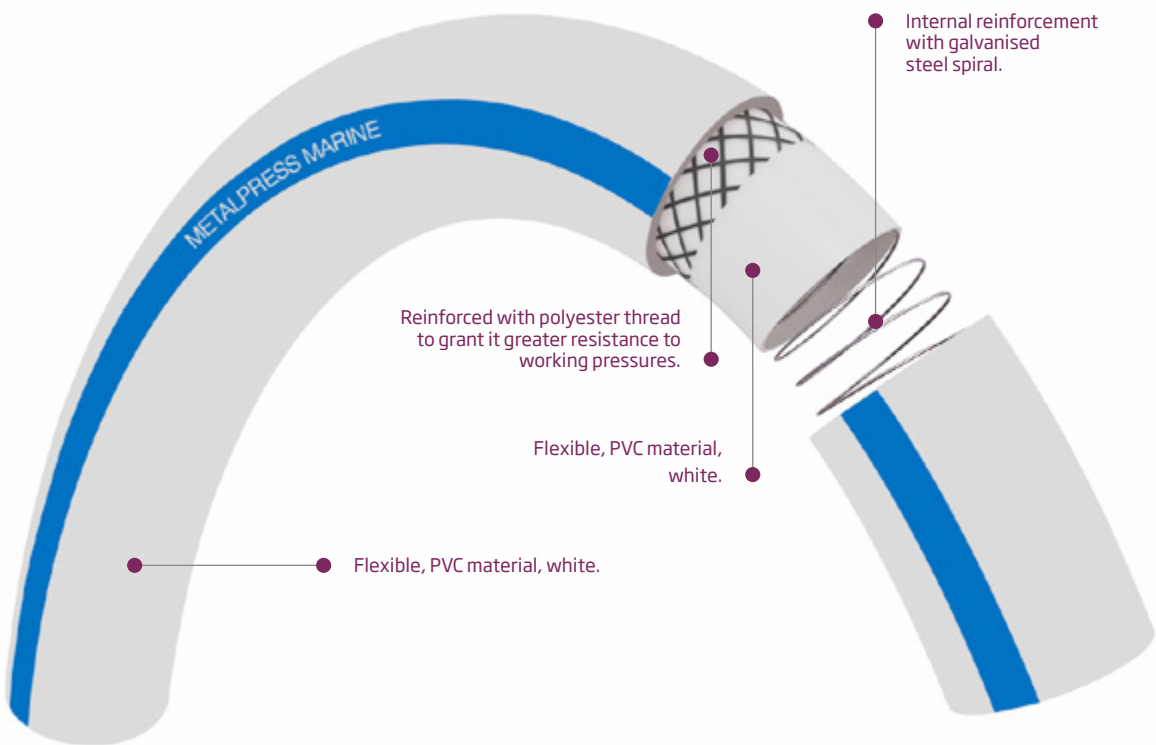

Features

- Good resistance to pressure and vacuum when suctioning.
- The hose wall is smooth, both inside and outside.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -25°C and 60°C.



INDUSTRIAL
USE



HIGH QUALITY
CONTROL



AGRICULTURAL
USE



NAUTICAL
USE



WINE
TRANSPORT



FREE FROM
Cd / Pb / Ba

Applications

- ▶ Waste water discharge systems.
- ▶ Bilge pumps in boats.
- ▶ Suction of cesspit.
- ▶ Drainage of all types of wells.

INT Ø mm	INT Ø in	EXT Ø mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
20	¾	30	538	16	48	80	9
25	1"	35.5	708	16	48	100	9
30	1" ¼	40.5	825	16	48	120	9
32	1" ¼	42.5	872	16	48	125	9
35	1" ⅜	47	1073	14	42	140	9
38	1" ½	51	1252	14	42	160	9
40	1" ⅝	53	1308	14	42	160	9
45	1" ¾	58	1503	12	36	180	9
51	2"	64	1651	12	36	200	9
60	2" ¼	74	2038	12	36	240	9
63	2" ½	77	2130	12	36	250	9
76	3"	91.8	2931	12	36	300	9
80	3" ⅛	95.8	3136	12	36	320	9
90	3" ½	105.8	3494	10	30	360	9
102	4"	117.8	3924	10	30	400	9
105	2" ½	120.8	4032	10	30	420	9
110	3"	126.7	4528	9	27	440	9
120	3" ⅝	136.7	5057	9	27	480	9
127	3" ½	143.7	5333	8	24	520	9
152	4"	169.9	6688	7	21	600	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances.
Depending on technical developments, specifications may be modified without advance notice being given.
Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.

