
243

SWIMMING POOL - CONSTRUCTION

Transflot® E.A.

Transparent, floating, highly flexible hose manufactured based on ethylene copolymers and reinforced by a blue, high-density polyethylene spiral.

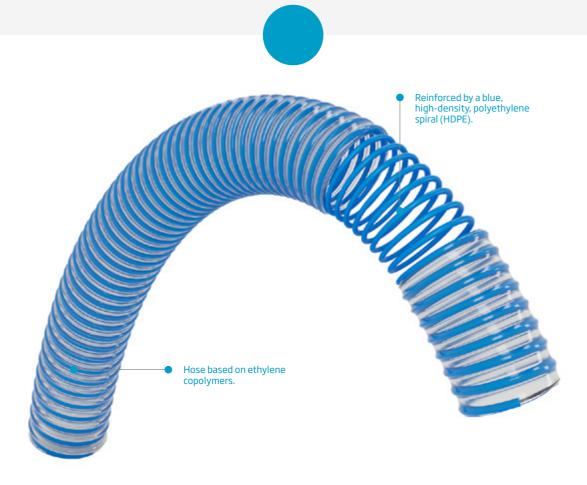

Features

- Floating.
- Highly resistant to crushing thanks to it being reinforced by high-density polyethylene (HDPE). Ideal for cleaning large swimming pools, or when superior vacuum levels are required.
- For special use in swimming pools.

- Resistant to UV rays, the cold and breakage when extended.
- Its bending radius is twice its internal
- Withstands temperatures between -25°C and 55°C.













FREE FROM



Professional swimming pool cleaning.

ø INT mm	ø INT IN	ø EXT mm	WEIGHT g/m	BENDING RADIUS mm	VACUUM m H₂0
38	1" 1/4	44	250	76	8
51	2"	57	430	100	8

Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters $\dot{\ }$



