

Transflot®


Floating, opaque, highly flexible hose manufactured based on ethylene-vinyl acetate copolymers.

Applications

- ▶ Swimming pool cleaner.
- ▶ Floating swimming pool cleaner.

234

TRANSFLOT®

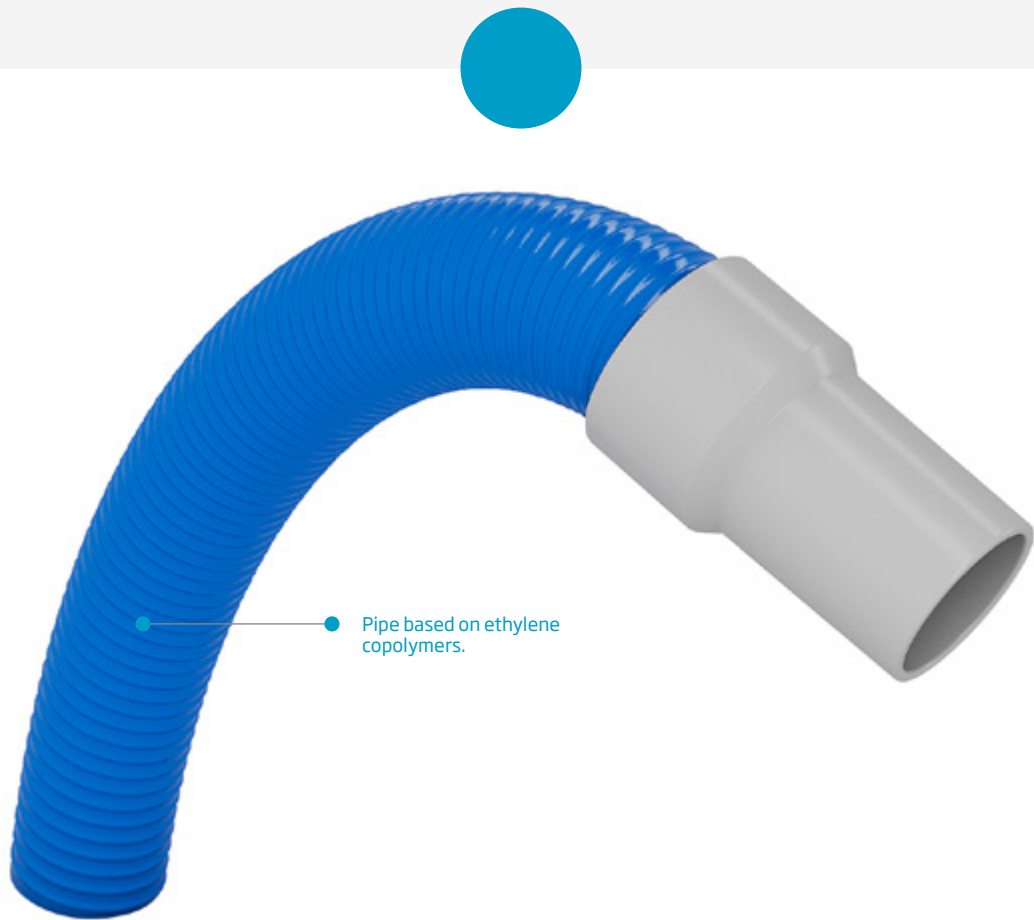

Features

- For domestic use and special use in swimming pools.
- Its corrugated, rounded profile and its specific weight of 0.989g/cm³ ensure its buoyancy when used.
- Easy to handle in swimming pool cleaners, either manually or automatically.
- Resistant to UV rays, the cold and breakage when extended.
- Its bending radius is twice its internal diameter.
- Extremely watertight in adherence to hose nozzles.
- Withstands temperatures between -25°C and 55°C.



DOMESTIC USE



USE
IN POOLS



EASY TO USE



HIGH QUALITY
CONTROL



FREE FROM
Cd / Pb / Ba

235

TRANSFLOT®



INT Ø mm	INT Ø in	EXT Ø mm	WEIGHT g/m	BENDING RADIUS mm	VACUUM m H ₂ O
32	1" 1/4	41	180	64	5
38	1" 1/2	47	220	76	5
51	2"	62	360	100	5

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances.
Depending on technical developments, specifications may be modified without advance notice being given.
Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters

