


Transfort® PU

Pumping and suction hose for slurries, industrial irrigation, cesspits, bilges and products with a very high aggressiveness index. Internal polyurethane layer to grant it greater resistance to abrasion.

Applications

- For pumping and suction of abrasive liquids: sludge, sand, cement, gravel, etc.
- Highly abrasive products.

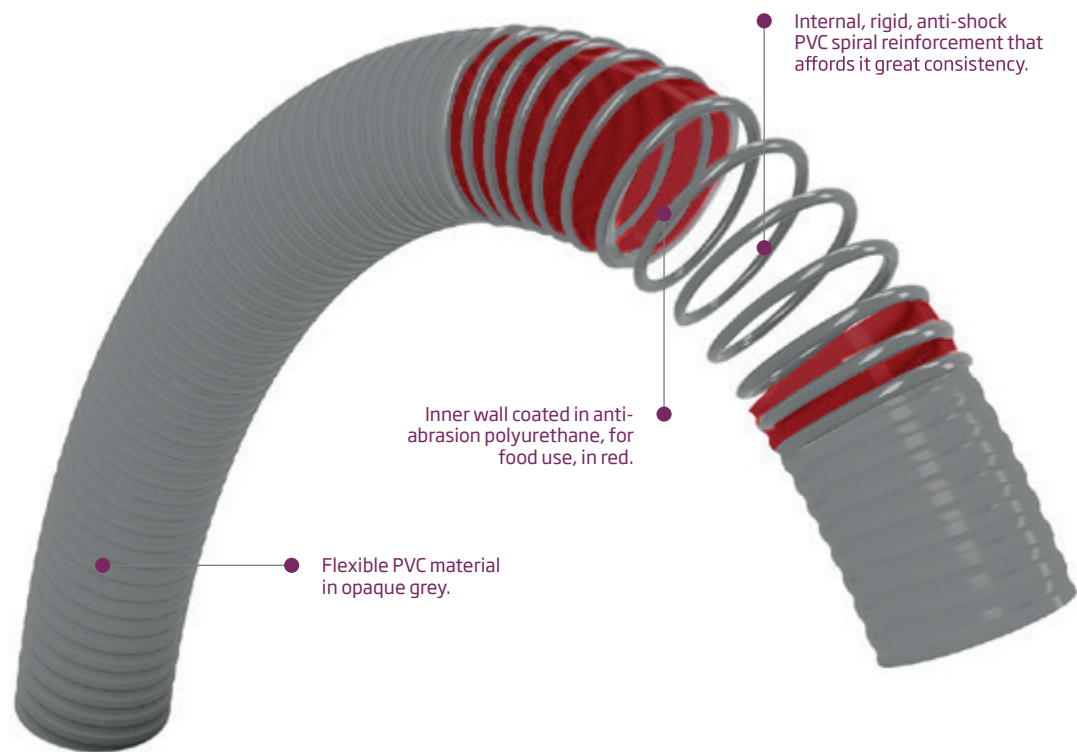

Features

- For agricultural, industrial and food use.
- Pumping and suction hose for slurries, industrial irrigation, cesspits, bilges and products that are extremely aggressive.
- Internal polyurethane layer to grant it greater resistance to abrasion.
- Recommended temperature for use between -10°C and 60°C.



INDUSTRIAL
USE



FOOD
USE



AGRICULTURAL
USE



ANTI-ABRASION



HIGH QUALITY
CONTROL



FREE FROM
Cd / Pb / Ba



UV PROTECTION

INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
40	1" 5/8	5	800	9	27	200	9
51	2"	5.5	1200	8	24	250	9
60	2" 1/32	6	1600	7	21	300	9
63	2" 1/2	6.5	1750	7	21	315	9
70	2" 3/4	7	1900	6	18	350	9
76	3"	7	2000	6	18	380	9
80	3" 1/8	7	2200	6	18	400	9
90	3" 1/2	7.5	2600	5	15	450	9
102	4"	8	3100	5	15	510	9
110	4" 5/16	8.3	3300	5	15	550	9
127	5"	8.3	3600	3	9	635	9
152	6"	10.5	6400	3	9	760	9
203	8"	12.5	10200	2	6	1015	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.