


Transfort®

Pumping and suction hose for slurries, industrial irrigation, cesspits, bilges and products with a high aggressiveness index.

Applications

- ▶ Pumping and suction in agricultural and industrial irrigation and slurry.
- ▶ Transport of granulated materials and drainage of cesspits.

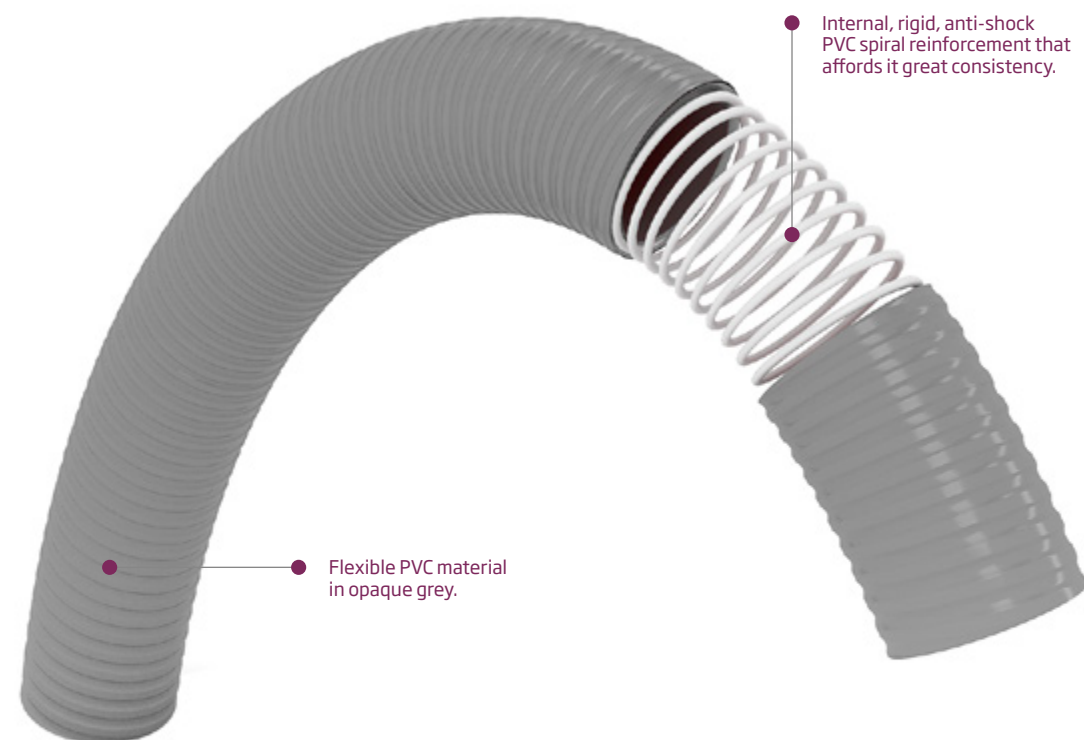

Features

- For agricultural and industrial use.
- The hose wall is smooth on the inside and corrugated on the outside.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -10°C and 60°C.



INDUSTRIAL
USE



AGRICULTURAL
USE



HIGH QUALITY
CONTROL



FREE FROM
Cd / Pb / Ba

INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
40	1" 5/8	5	765	5	15	200	9
45	1" 3/4	5.5	900	5	15	225	9
51	2"	5.5	1080	5	15	250	9
55	2" 1/8	5.5	1180	5	15	275	9
60	2" 1/32	6.2	1440	5	15	300	9
63	2" 1/2	6.2	1500	5	15	315	9
70	2" 3/4	6.5	1650	5	15	350	9
76	3"	6.5	1800	5	15	375	9
80	3" 1/8	6.5	1980	4	12	400	9
90	3" 1/2	7	2340	4	12	450	9
102	4"	7.5	2970	3	9	500	9
110	4" 3/4	7.5	3240	3	9	550	9
120	5"	7.5	3500	3	9	600	9
127	5"	7.5	3600	3	9	625	9
130	5" 1/2	7.5	3750	3	9	650	9
140	6"	7.5	5300	3	9	700	9
152	6"	9.5	5670	3	9	750	9
160	8"	9.5	6000	3	9	800	9
203	10"	11.5	9250	2.5	7.5	1000	9
254	12"	12.5	11700	2.5	7.5	1250	9
305	12"	12.5	13500	2.5	7.5	1500	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.

