


Transliquid® S

Light hose for pumping by suction and impulsion of food liquids.

Applications

- ▶ Transfer of liquid food products that require food simulants A, B and C in OM2 conditions in accordance with Regulation EU 10/2011.
- ▶ Pumping and suction in agricultural and industrial irrigation.

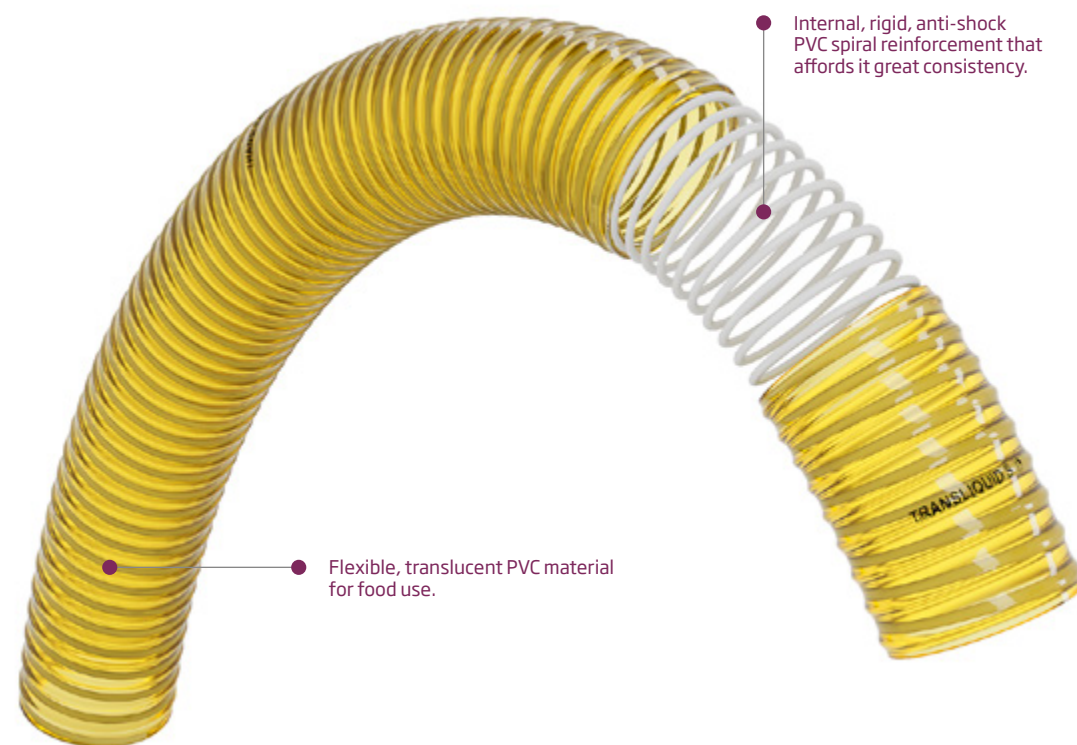

Internal, rigid, anti-shock PVC spiral reinforcement that affords it great consistency.

Flexible, translucent PVC material for food use.

Features

- For food use in accordance with European regulations EC 1935/2004 and EU 10/2011 (see declaration of conformity).
- The hose wall is smooth on the inside and corrugated on the outside.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -10°C and 60°C.



FOOD USE



INDUSTRIAL USE



AGRICULTURAL USE



HIGH QUALITY CONTROL



FREE Cd-Pb-Ba

FREE FROM Cd / Pb / Ba

INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O	COLOURS AVAILABLE
15	5/8"	3	140	5	15	45	9	 
20	3/4"	3	220	5	15	60	9	
25	1"	3	280	5	15	75	9	
30	1" 1/8	3	315	5	15	90	9	
32	1" 1/4	3	335	5	15	96	9	
35	1" 3/8	3.2	410	5	15	105	9	
38	1" 1/2	3.2	440	5	15	120	9	
40	1" 5/8	3.2	470	4	12	120	9	
45	1" 3/4	3.5	570	4	12	135	9	
51	2"	3.5	680	4	12	150	9	
55	2" 1/8	3.8	730	4	12	165	9	
60	2" 1/32	3.8	810	3	9	180	9	
63	2" 1/2	3.8	875	3	9	195	9	
70	2" 3/4	3.8	940	3	9	210	9	

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.