


Transliquid® Antiestático

Spiral PVC hose specially designed for pellet pumping and suction of liquid food products. Antistatic product suitable for facilities governed by ATEX regulations.

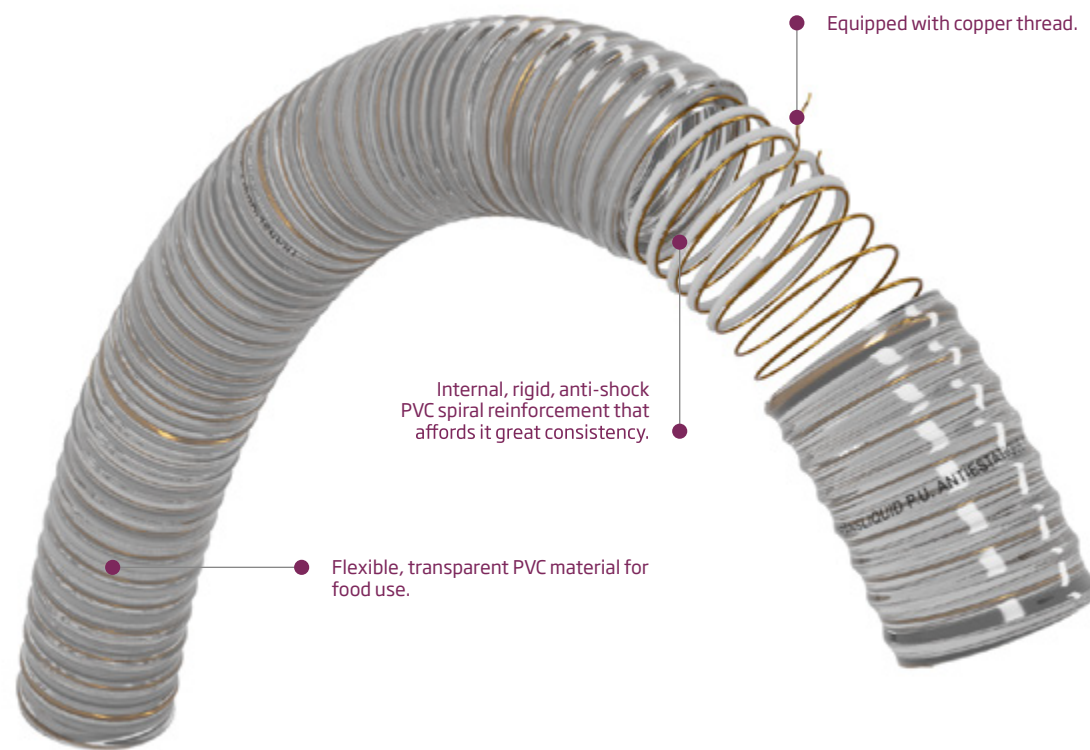

Features

- For food use in accordance with European regulations EC 1935/2004 and EU 10/2011 (see declaration of conformity).
- Equipped with a copper wire that makes it antistatic.
- UV protected.
- The hose wall is smooth on the inside and corrugated on the outside.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -10°C and 60°C.



FOOD
USE



INDUSTRIAL
USE



AGRICULTURAL
USE



ANTISTATIC



FREE FROM
Cd / Pb / Ba



HIGH QUALITY
CONTROL

Applications

- ▶ Pumping and suction of pellet.
- ▶ Transfer of liquid food products that require food simulants A, B and C in OM2 conditions in accordance with Regulation EU 10/2011.
- ▶ Pumping and suction in agricultural and industrial irrigation when the facility needs to have antistatic properties.

INT Ø mm	INT Ø in	WALL THICKNESS mm	WEIGHT g/m	OPERATING PRESSURE bar	MINIMUM BURST PRESSURE bar	BENDING RADIUS mm	VACUUM m H ₂ O
20	3/4"	3.3	285	7	21	80	9
25	1"	3.5	360	7	21	100	9
30	1" 1/8	3.5	405	5	15	120	9
32	1" 1/4	3.5	435	5	15	128	9
35	1" 3/8	3.5	495	5	15	140	9
38	1" 1/2	3.8	520	5	15	152	9
40	1" 5/8	4	540	5	15	160	9
45	1" 3/4	4	630	5	15	180	9
51	2"	4	765	5	15	200	9
55	2" 1/8	4	810	5	15	220	9
60	2" 1/32	4.5	900	4	12	240	9
63	2" 1/2	4.5	990	4	12	260	9
70	2" 3/4	4.5	1125	4	12	280	9
76	3"	4.5	1260	4	12	300	9
80	3" 1/8	5	1440	4	12	320	9
90	3" 1/2	5	1665	3	9	360	9
102	4"	5.5	1980	3	9	400	9
110	4" 5/16	6	2250	3	9	440	9
120	4" 3/4	6.5	2500	3	9	480	9
127	5"	6.5	2700	3	9	500	9
140	5" 1/2	7	3600	3	9	560	9
152	6"	7	3870	3	9	600	9
203	8"	8.5	6270	2.5	7.5	800	9

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances.
Depending on technical developments, specifications may be modified without advance notice being given.
Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters.