


Vacumflex®

Plasticised PVC hose, reinforced with a galvanised steel spiral that grants it an antistatic feature, making it perfect for facilities governed by ATEX regulations and designed for industrial ventilation of low-abrasion content.

Applications

► Suction of low-abrasion content, dust, gases, sawdust, threads, etc.

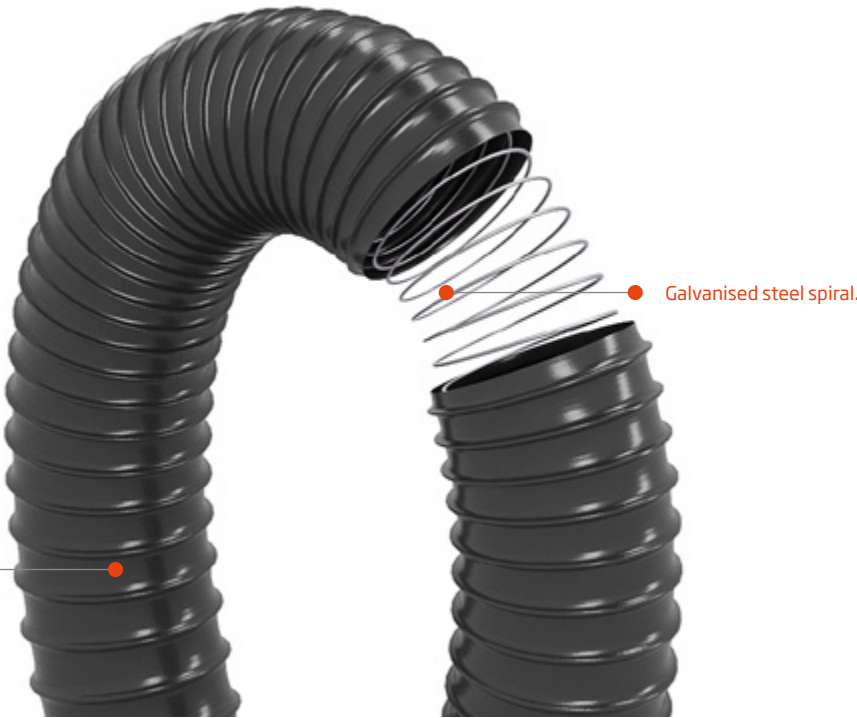

Features

- For industrial use.
- Highly flexible and light.
- Antistatic.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -10°C and 60°C.



INDUSTRIAL USE



VENTILATION



SUCTION



METAL SPIRAL



LIGHT



FREE
Cd / Pb / Ba



TEMPERATURE
-10°C TO 60°C

INT Ø mm	INT Ø in	WEIGHT g/m	BENDING RADIUS mm	VACUUM m H ₂ O
40	1" 5/8	430	47	3
45	1" 3/4	470	52	3
51	2"	530	57	2.5
60	2" 1/4	630	67	2.5
70	2" 3/4	670	77	2.5
76	3"	730	82	2.5
80	3" 1/8	790	88	2.5
90	3" 1/2	820	98	2.5
102	4"	1200	108	2.5
110	4" 5/16	1300	118	2.5
120	4" 3/4	1360	128	2.5
127	5"	1420	133	2.5
130	5" 1/4	1500	138	1.2
140	5" 1/2	1700	148	1.2
150	6"	1750	158	1.2
160	6" 1/4	1800	168	1.2
170	6" 3/4	2050	178	1.2
180	7"	2150	188	1.2
203	8" 3/4	2250	208	1
254	10"	3150	260	1
305	12"	3800	310	0.5
350	14"	4450	360	0.5
400	16"	5000	410	0.5
450	18"	5300	460	0.2
500	20"	5700	510	0.2
600	24"	5800	610	0.2

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters

