


Washing Machine Inlet

Hose made via the extrusion of plasticised PVC and internally reinforced by a polyester mesh.

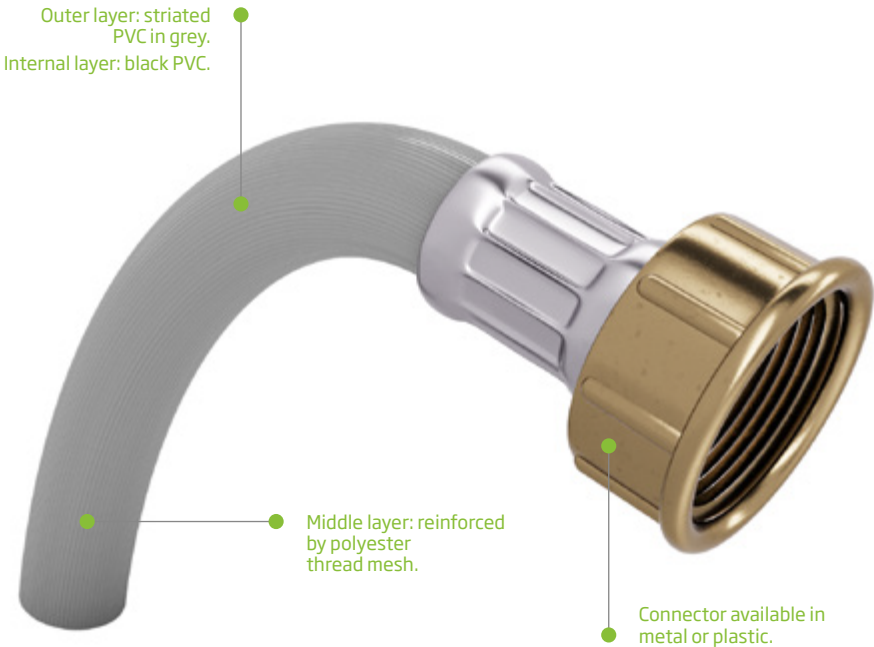

Features

- For sanitary use.
- Striated external surface.
- Assembly with perfectly watertight nylon or metal connections.
- Good chemical resistance associated with PVC's resistance chart.
- Recommended temperature for use between -10°C and 25°C.



DOMESTIC USE



INDUSTRIAL USE



STRIATED



HIGH QUALITY CONTROL



FREE FROM Cd / Pb / Ba



Applications

- Supply of water to washing machines and dishwashers.



Pack

LENGTH	1.5 m	2 m	2.5 m	3 m
UNITS	50	50	40	35
INT Ø mm	11	7/16"	16	150
INT Ø in				10
EXT Ø mm				30
WEIGHT g/m				
OPERATING PRESSURE bar				
MINIMUM BURST PRESSURE bar				

Pressure at room temperature in laboratory / Nominal values without considering manufacturing tolerances. Depending on technical developments, specifications may be modified without advance notice being given. Consult us for other diameters, colours and features. Ask our Sales Department about the minimum purchase amounts assigned to non-standard diameters

